

- Client
DISTRICT OF COLUMBIA PUBLIC LIBRARY
901 G Street, NW
Washington, DC 20001
202.442.6970
- Construction Manager
SMOOT CONSTRUCTION COMPANY
5335 Wisconsin Avenue, NW
Suite 940
Washington, DC 20007
202.243.9888

- Architect
MARTINEZ + JOHNSON ARCHITECTURE
1412 Eye Street, NW
Washington, DC 20005
202.333.4480
- Structural Engineer
RESTL DESIGNERS
202.452.1103
- MEP Engineer
JOHN J. CHRISTIE & ASSOCIATES
301.608.0005
- Associate Architect
HOSHIDE WILLIAMS ARCHITECTS
206.323.6441
- Civil Engineer
LEE + PAPA AND ASSOCIATES
202.289.4545
202.466.6966



1. CONTRACTOR SHALL HAVE THE APPROVAL OF THE D.C. LIBRARY BEFORE DISPOSING ANY UNWANTED EQUIPMENT.
2. CONTRACTOR SHALL REMOVE ANY AND ALL MECHANICAL EQUIPMENT PRESENTLY EXPOSED OR OTHERWISE WITHIN THE BUILDING, ALL VENTS AND EXHAUSTS OF ANY KIND, MOUNTING HARD WARE ASSOCIATED WITH EQUIPMENT, DUCTS, PIPES, ANY AND ALL CONTROLLING DEVICES.

MECHANICAL DEMOLITION KEY NOTES:

1. REMOVE ALL EXISTING COOLING COILS WITH ASSOCIATED DUCT, CHILLED WATER PIPING CONDENSATE PIPE AND VALVES.
2. REMOVE ALL EXISTING RADIATORS WITH ASSOCIATED HOT WATER PIPING AND VALVES.
3. REMOVE ALL EXISTING TOILETS EXHAUST FANS WITH ASSOCIATED DUCT AND GRILLES.
4. REMOVE EXISTING DUCTS, COOLING COILS WITH ASSOCIATED GRILLES, PIPING VALVES AND HANGERS.
5. REMOVE ALL EXISTING OUT DOOR INTAKE AND EXHAUST LOUVERS WITH ASSOCIATE MOD AND GRILLES.
6. REMOVE AND HANDLE WITH CARE THE EXISTING PACKAGE A/C UNIT THEN STORE IN SAFE LOCATION AND DEMOLISHED THE ATTACHED FRESH AIR INTAKE DUCT.
7. REMOVE EXISTING AIR SEPARATOR WITH ASSOCIATED PIPING AND VALVES.
8. REMOVE, HANDLE WITH CARE AND STORE IN THE SAFE AREA THE EXISTING STEAM BOILER.
9. REMOVE THE EXISTING RECEIVER ENSEMBLE UNIT WITH ASSOCIATED PIPING, MOTORS AND STORE TOGETHER WITH THE EXISTING BOILER.
10. REMOVE ALL EXISTING BOILER, RECEIVER AND CONDENSATE PUMP DISCONNECTS.
11. REMOVE EXISTING TUBULAR BAG SEPERATOR, ASSOCIATED PIPING AND STORE TOGETHER WITH EXISTING BOILER.
12. REMOVE EXISTING TANK AND STORE TOGETHER WITH EXISTING BOILER.
13. REMOVE EXISTING VACUUM PUMP AND MOTOR WITH ASSOCIATED PIPING AND STORE IN SAFE LOCATION.
14. REMOVE EXISTING OIL STORAGE TANKS WITH ASSOCIATED PIPING.

DEMOLITION SYMBOLS

- REMOVE EXISTING EQUIPMENT
- REMOVE EXISTING DIFFUSER, GRILLE, REGISTER
- REMOVE EXISTING PIPE.
- REMOVE EXISTING RISER.
- REMOVE EXISTING DUCT.
- REMOVE EXISTING CONNECTOR / RADIATOR .

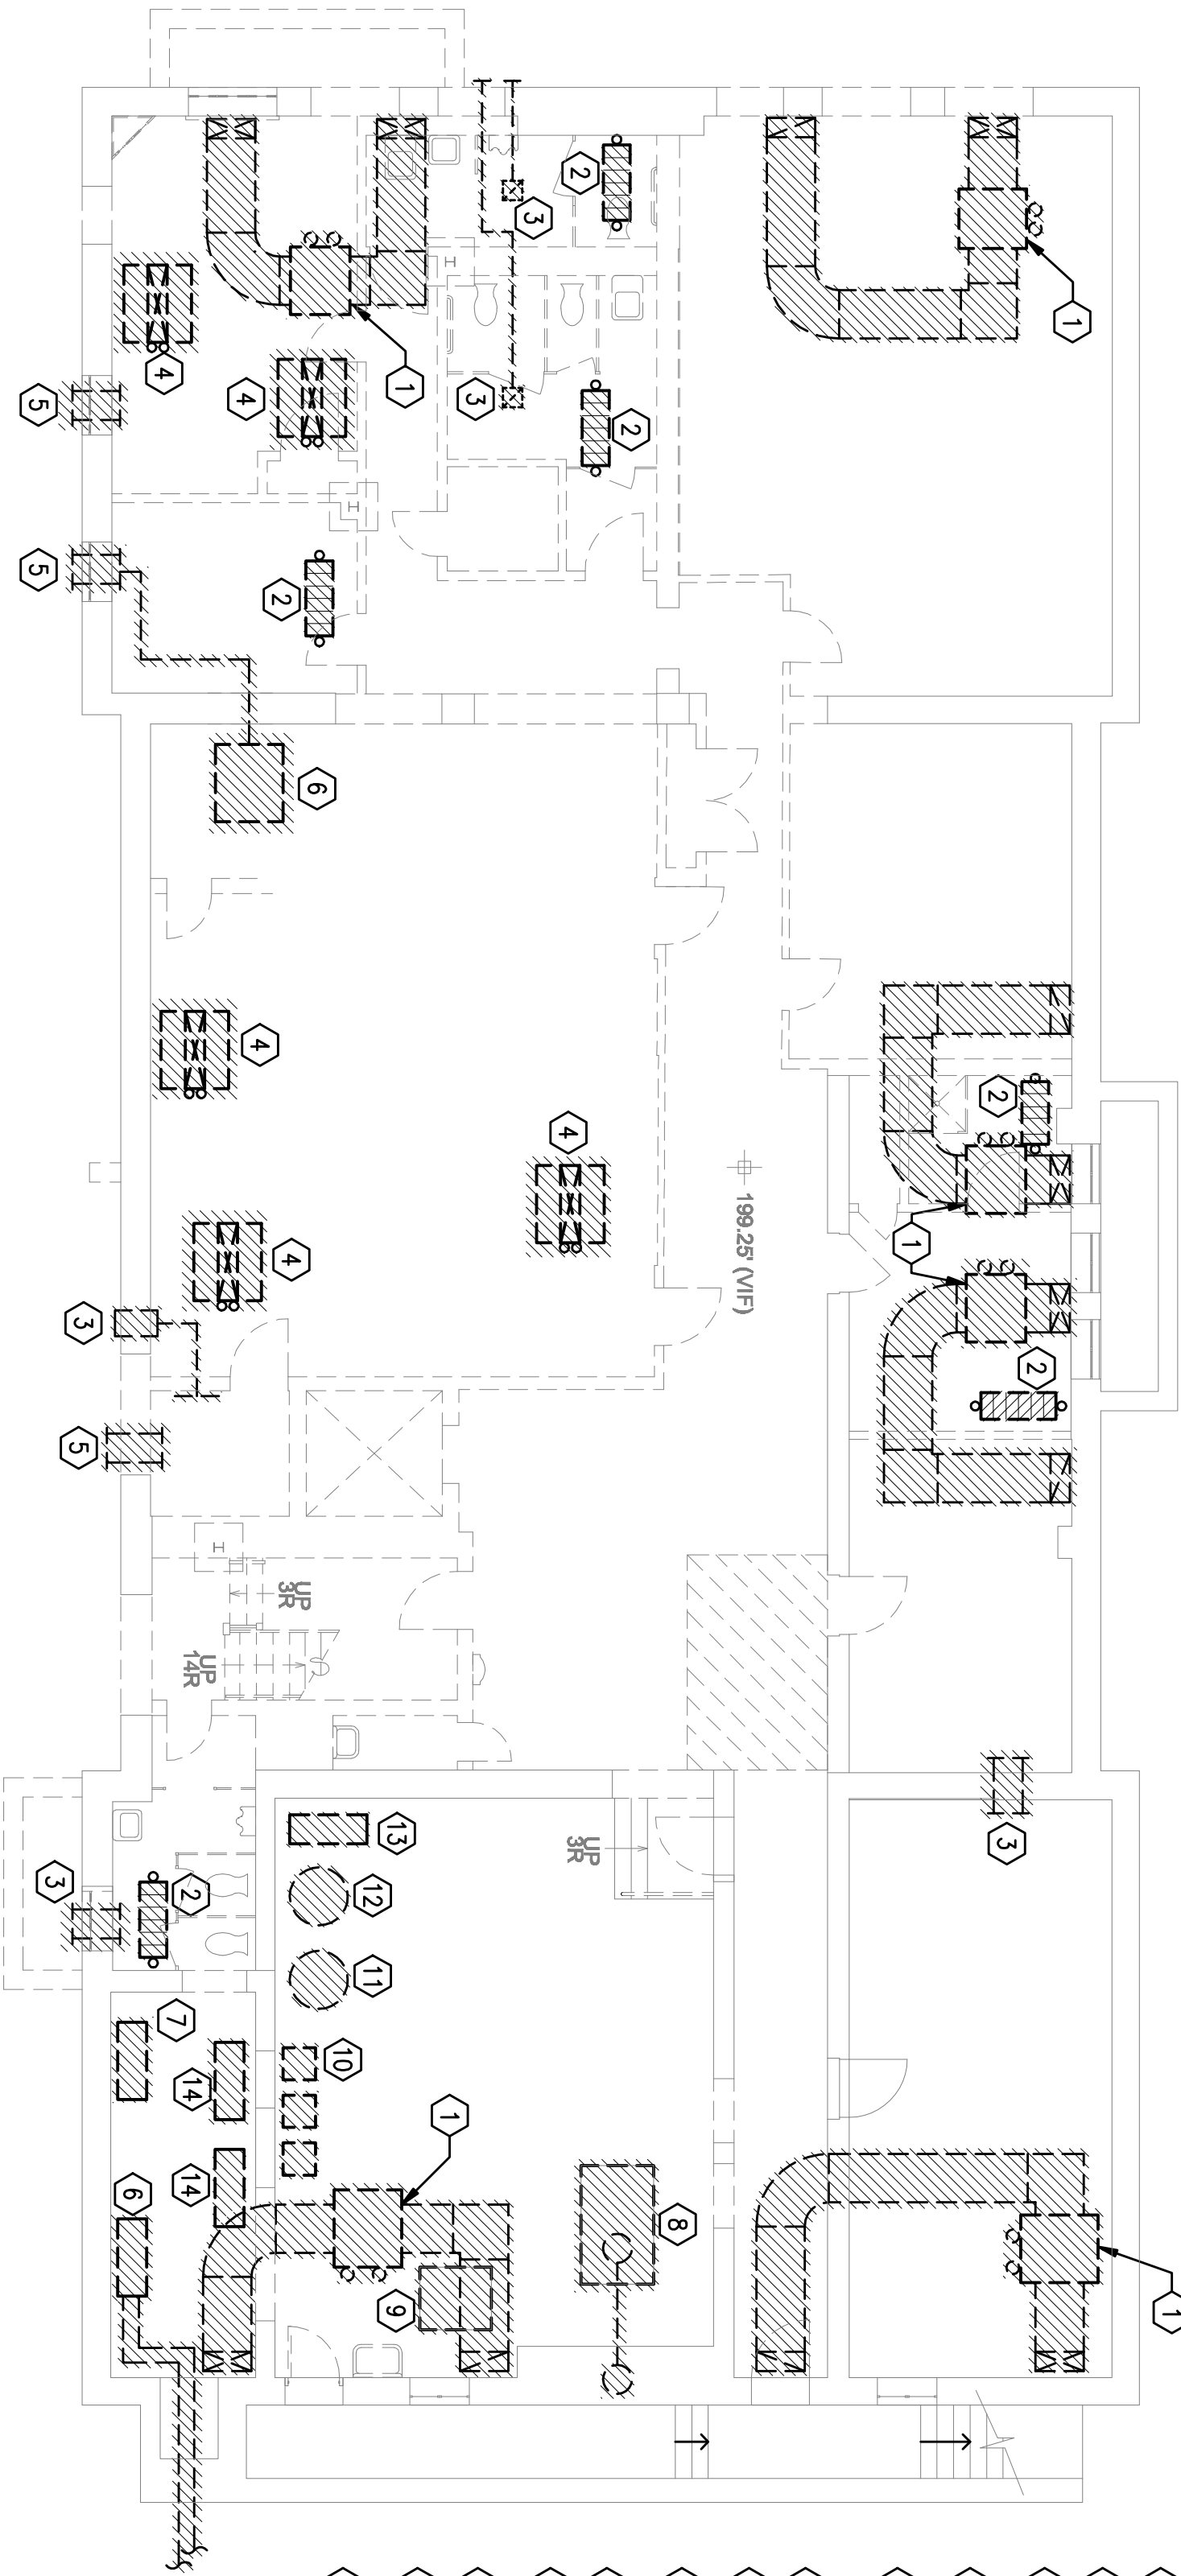

SHEET TITLE:
LOWER LEVEL
PLAN
DEMOLITION
MECHANICAL
DM-1.01